

PTZ 4G solární outdoor kamera



Návod k použití

Před prvním použitím si, prosím, pečlivě přečtěte uvedený manuál. Manuál si ponechte pro pozdější referenci.

Uvedené obrázky a ilustrace se mohou lišit podle modelu zařízení.

Specifikace produktu

Seznam balení: xiaovv venkovní solární PTZ 4G kamerax1, solární panelx1, manuálx1,

Montážní držák x3, sada šroubů x3, napájecí adaptér x1, napájecí kabel x1

Model produktu: XVV-1120G-P6 Pro-4G

Napájení: Solární panel nebo napájecí adaptér DC_5V

FOV: 110°±5°

PTZ: Pan 355°, Tilt 90°, Digital Zoom

Kódování videa: H.265/15FPS

Rozlišení: 2,0 MP

Infračervené noční vidění: 2 infračervená světla

Barevné noční vidění: 2 bílá LED světla

Provozní teplota: -10°C~+50°C


Provozní vlhkost: ≤ 75 % RH

Síť: LTE-4G

Úložiště: MicroSD karta (max. 128 GB)/Cloudové úložiště


Podpora: Android 5.0/iOS 11 nebo vyšší

Představení produktu

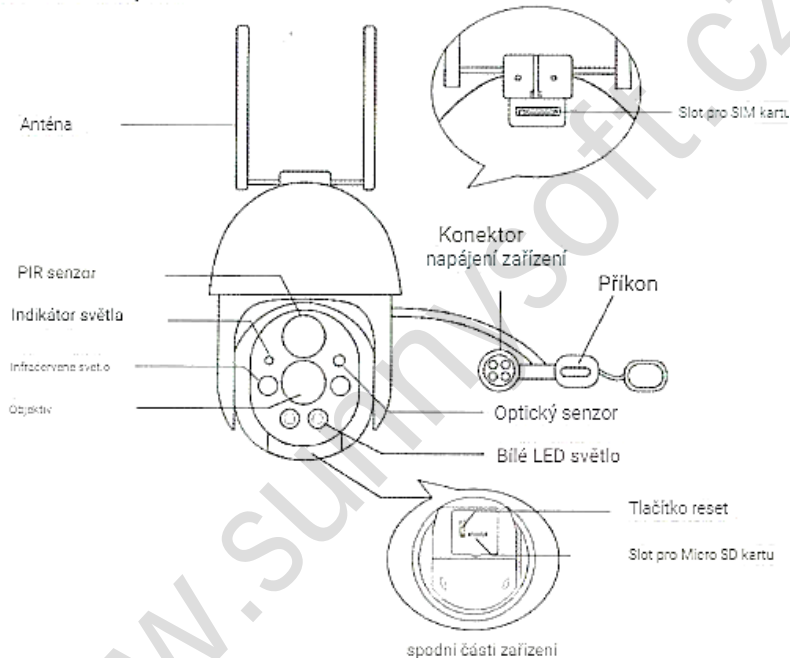

Nabíjení

1. Před instalací se doporučuje plně nabít baterii.
 2. Odkryjte vodotěsnou pryžovou zátku a poté otočte přepínač do polohy „OFF“, abyste maximalizovali účinnost nabíjení během nabíjení.
 3. Nabijte baterii připojením kabelu k dodanému napájecímu adaptéru. Svítící červená kontrolka znamená, že se baterie nabíjí, a po úplném nabití baterie zhasne.
- * Před prvním použitím se doporučuje nabíjet baterii déle než 12 hodin.
4. Po úplném nabití baterie přepněte vypínač solárního panelu do polohy „ON“ a poté zakryjte vodotěsnou pryžovou zátku.

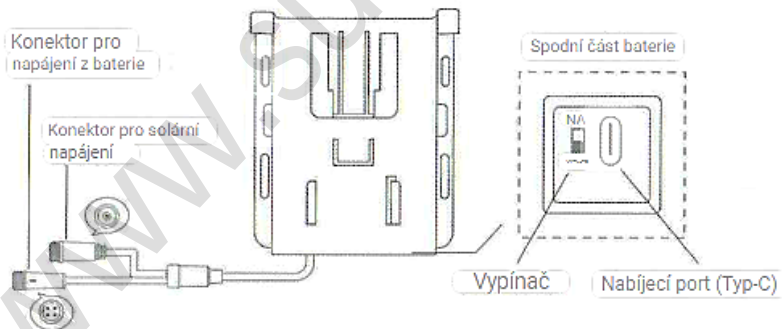


Typy napájecích zdrojů

Typ 1

Napájení z baterie: Připojte konektor napájení zařízení ke ② Konektor napájení z baterie


Typ 2

Napájení napájecího adaptéru: Připojte 3 Type-C k napájecímu kabelu 4 Adaptéru.

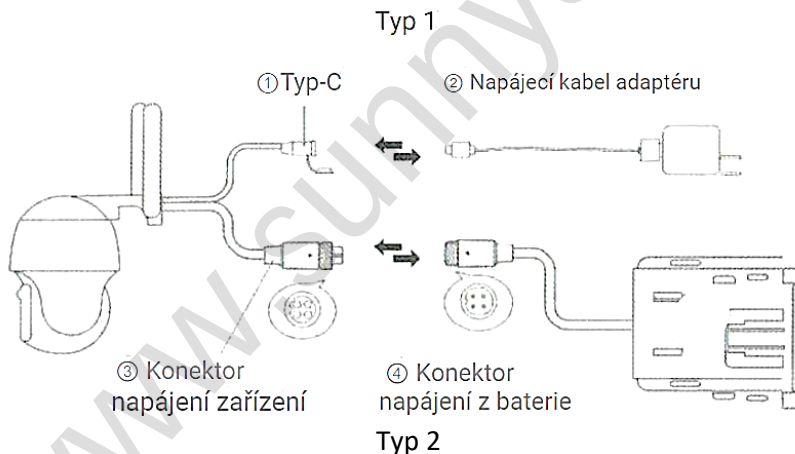

Inicializace zařízení

Stiskněte a podržte tlačítko reset na několik sekund, zařízení zobrazí výzvu „Reset dokončen“ a kontrolka bude střídavě blikat, což znamená, že reset byl úspěšný.

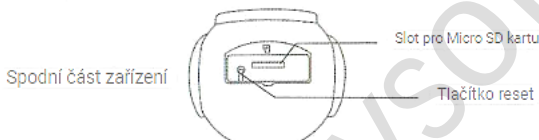

Kontrolka zařízení

1. Indikátor nesvítí: zařízení je vypnuto nebo je v pohotovostním režimu;
2. Indikátor je červený: zařízení je zapnuto a probouzí se, ale síť je nedostupná;
3. Indikátor je žlutý: zařízení je připojeno k síti;
4. Kontrolka trvale bliká: zařízení nemůže detekovat SIM kartu, zkontrolujte, zda je karta vložena;
5. Kontrolka dvakrát nepřetržitě bliká: SIM kartu lze detekovat, ale zařízení se nemůže připojit k internetu. Zkontrolujte, zda je k dispozici mobilní datový tarif.

Nainstalujte xiaovv APP



Stáhněte a nainstalujte xiaovv z obchodu APP Store nebo naskenujte QR kód



Naskenujte QR kód a stáhněte si aplikaci xiaovv


Přidat kameru

1. Otevřete aplikaci xiaovv APP a zaregistrujte svůj účet a přihlaste se.
2. Klikněte na ikonu „+“ a naskenujte QR kód na zařízení nebo ručně zadejte ID zařízení a poté podle pokynů přidejte zařízení.

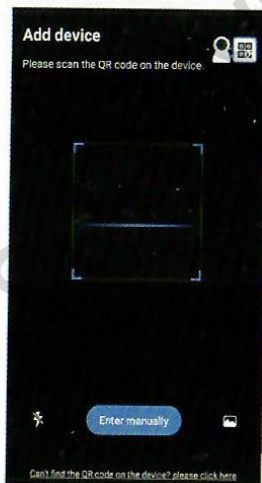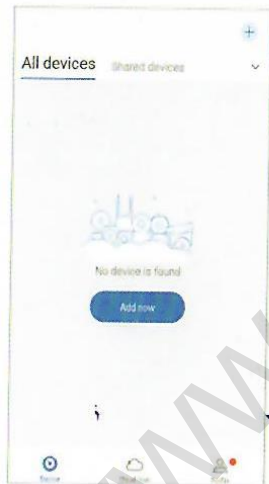

Živé zobrazení

Živé zobrazení můžete používat v APP, když je zařízení online.

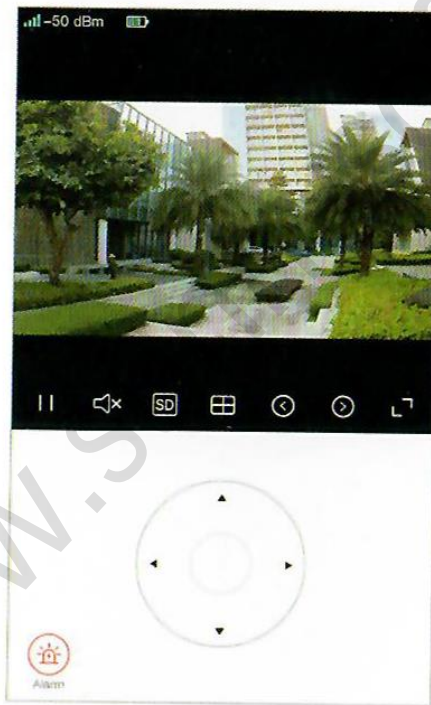


Montáž




Typ1



Typ2



Typ3



Dvojité solární panely
(extra)



Inverzní montáž
(špatně)




Boční montáž
(špatně)


Nainstalujte prosím zařízení na místo se silným signálem Wi-Fi.

Po dokončení konfigurace sítě se podívejte na signál Wi-Fi v levém horním rohu obrazu v reálném čase v APP. Pokud je signál slabý, před instalací a konfigurací sítě optimalizujte prostředí Wi-Fi.

1. Vyberte si šablonu montážního otvoru, kterou potřebujete, a nalepte ji na stěnu.

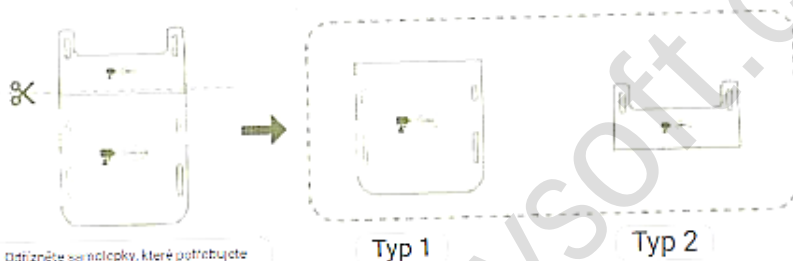


2. Vyrtejte otvory do zdi podle značky na montážní šabloně, průměr otvoru je asi 6 mm a hloubka otvoru je asi 26 mm.

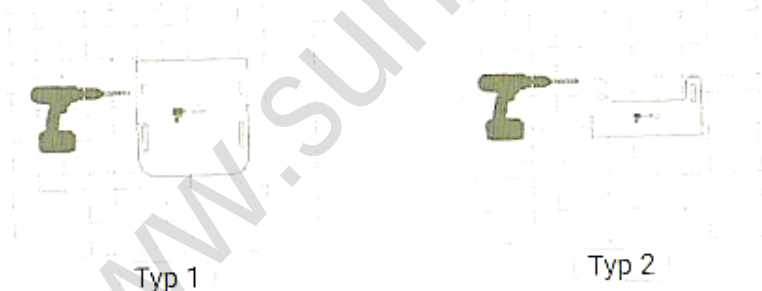


*Stěna musí unést váhu 3 kamer.

3.



Upevněte držák na stěnu
pomocí dodaných šroubů



Namontujte zařízení na držák




Namontujte solární panel na držák
(typ 1)



Upevněte držák na stěnu
pomocí dodaných šroubů
(typ 2)

4. Připojte solární panel k baterii.

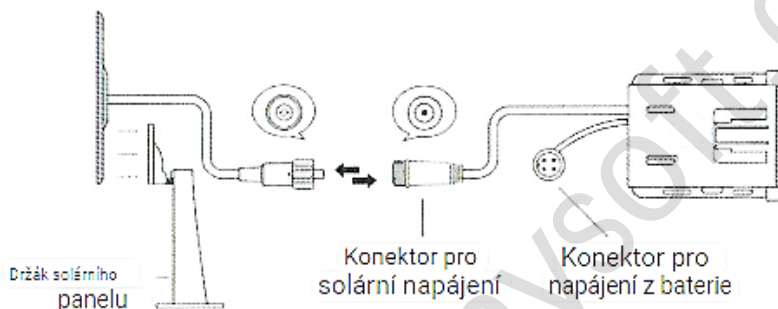

Tipy pro detekci pohybu PIR:

Detekce pohybu PIR: zařízení detekuje infračervené paprsky vyzařované lidským tělem na základě pasivního infračerveného senzoru (PIR) pro spuštění poplachu. "Citlivost PIR" lze nastavit v "nastavení". Pro použití v prostředí se silným provozem se doporučuje nastavit "PIR citlivost" na nízkou, aby nedocházelo ke zbytečnému buzení pro prodloužení životnosti baterie zařízení.



Cloudová služba

Tyto speciální funkce si můžete užívat po přihlášení ke cloudové službě na rozhraní [Cloud Disk] aplikace xiaovv.



Cloud storage

Cloudové úložiště



Speed up playback

Zrychlete přehrávání



Alarm recording

Záznam poplachu



Check at any time

Kdykoli zkontrolovat



Security encryption

Bezpečnostní šifrování



Loop video recording

Smyčkové nahrávání videa

Distributor

Sunnysoft s.r.o.
Kovanecká 2390/1a
190 00 Praha 9
Česká republika
www.sunnysoft.cz



xiaovv Solar-Powered Outdoor PTZ 4G Camera
Product Manual V1.0

P6 Pro 4G

Product Specifications

Packing List: xiaovv Solar-Powered Outdoor PTZ 4G Camera×1, Solar Panel×1, Manual×1,
Mounting Bracket ×3, Screw Pack×3, Power Adapter×1, Power Cord×1

Product Model: XVV-1120G-P6 Pro-4G Power: Solar panel or DC_5V power adapter supply

FOV: 110°±5°

PTZ: Pan 355°, Tilt 90°, Digital Zoom

Video Encoding: H.265/15FPS

Resolution: 2.0MP

Infrared Night Vision: 2 infrared lights

Color Night Vision: 2 white LED lights

Operating Temperature: -10°C~+ 50°C

Operating Humidity: ≤75%RH


Network: LTE-4G

Storage: MicroSD card(Max.128GB)/Cloud storage

Support: Android 5.0/iOS 11 or above

Please read carefully before using the device and keep it for subsequent use

Product Introduction

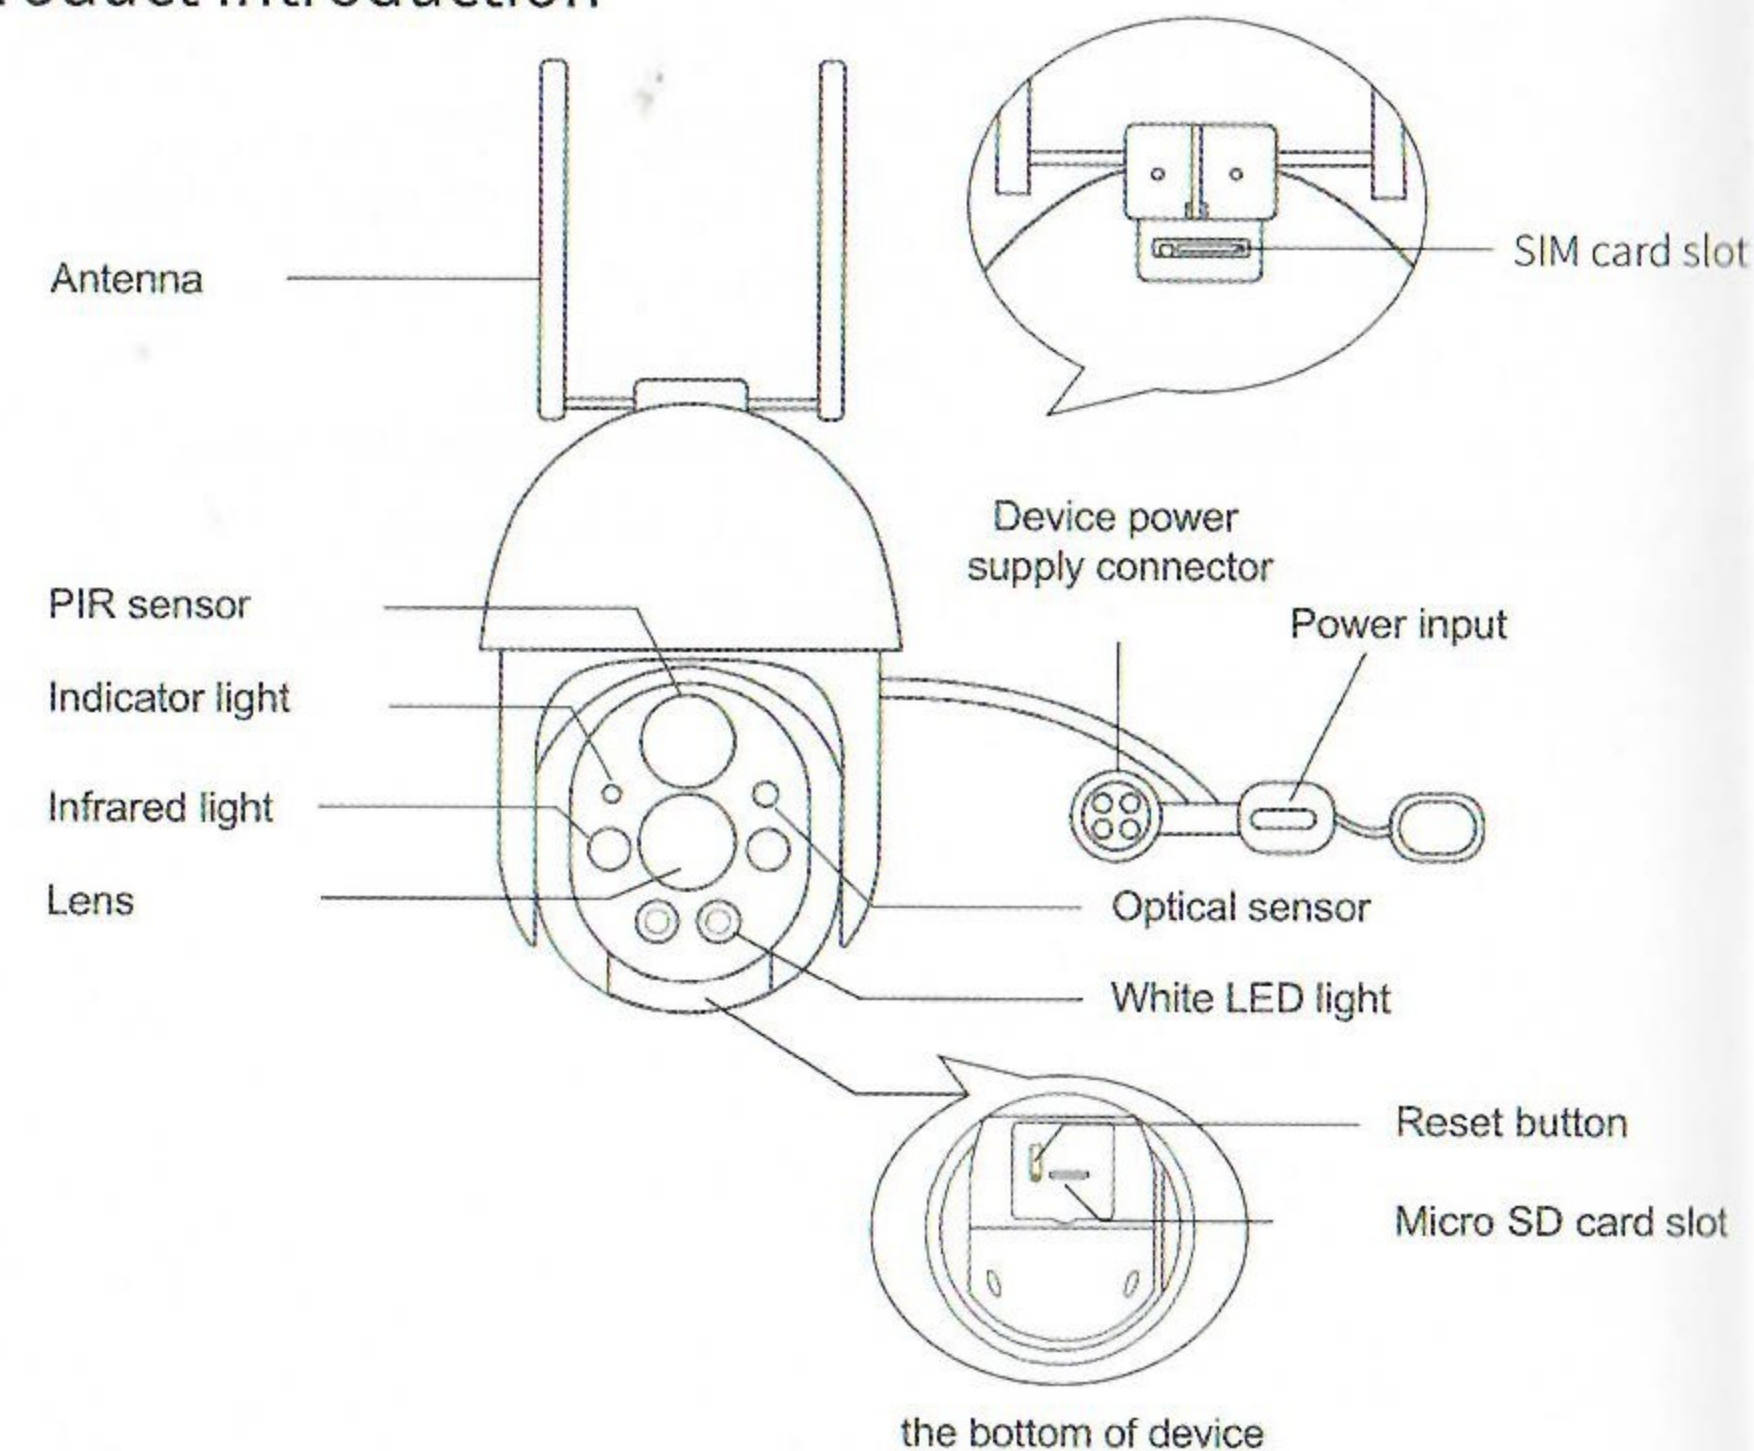


Charging

1. It is recommended that the battery should be fully charged before installation.
2. Uncover the waterproof rubber plug then turn the switch to "OFF" to maximize the charging efficiency during charging.
3. Charge the battery by plugging it into the provided power adapter with its cord. The lit red indicator light means the battery is charging, and it will be off when battery is fully charged.

* It is recommended to charge the battery more than 12 hours before first using.

4. After battery is fully charged, turn the solar panel power switch to the "ON", then cover the waterproof rubber plug.

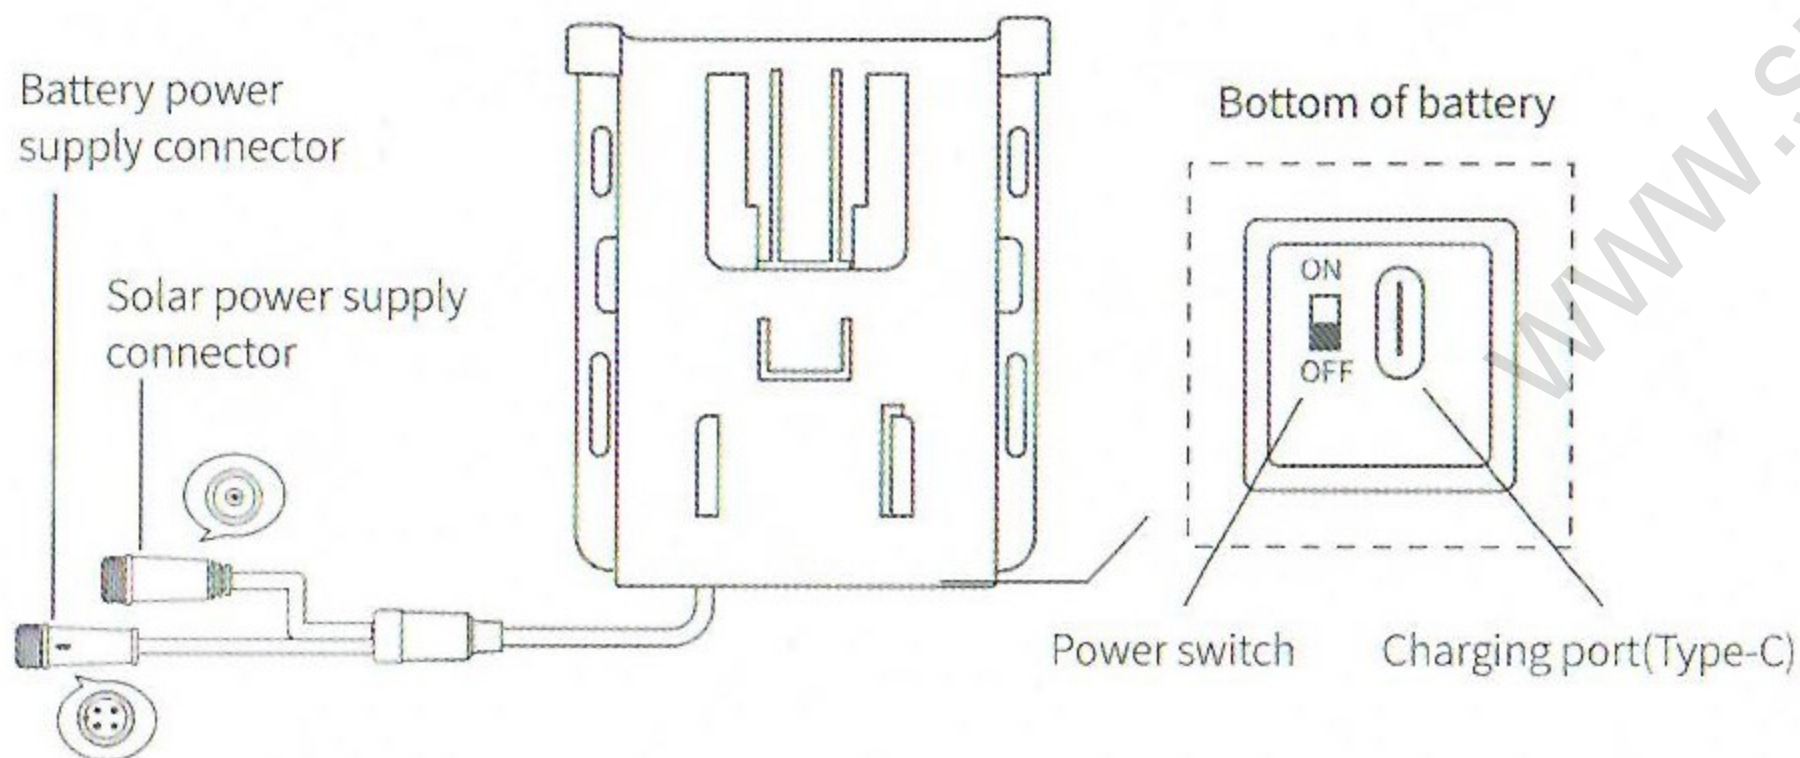


Power supply types

Type 1

Battery power supply: Connect the ① Device power supply connector to the ② Battery power supply connector.

Type 2


Power adapter supply: Connect the ③ Type-C to the ④ Adapter power cord.

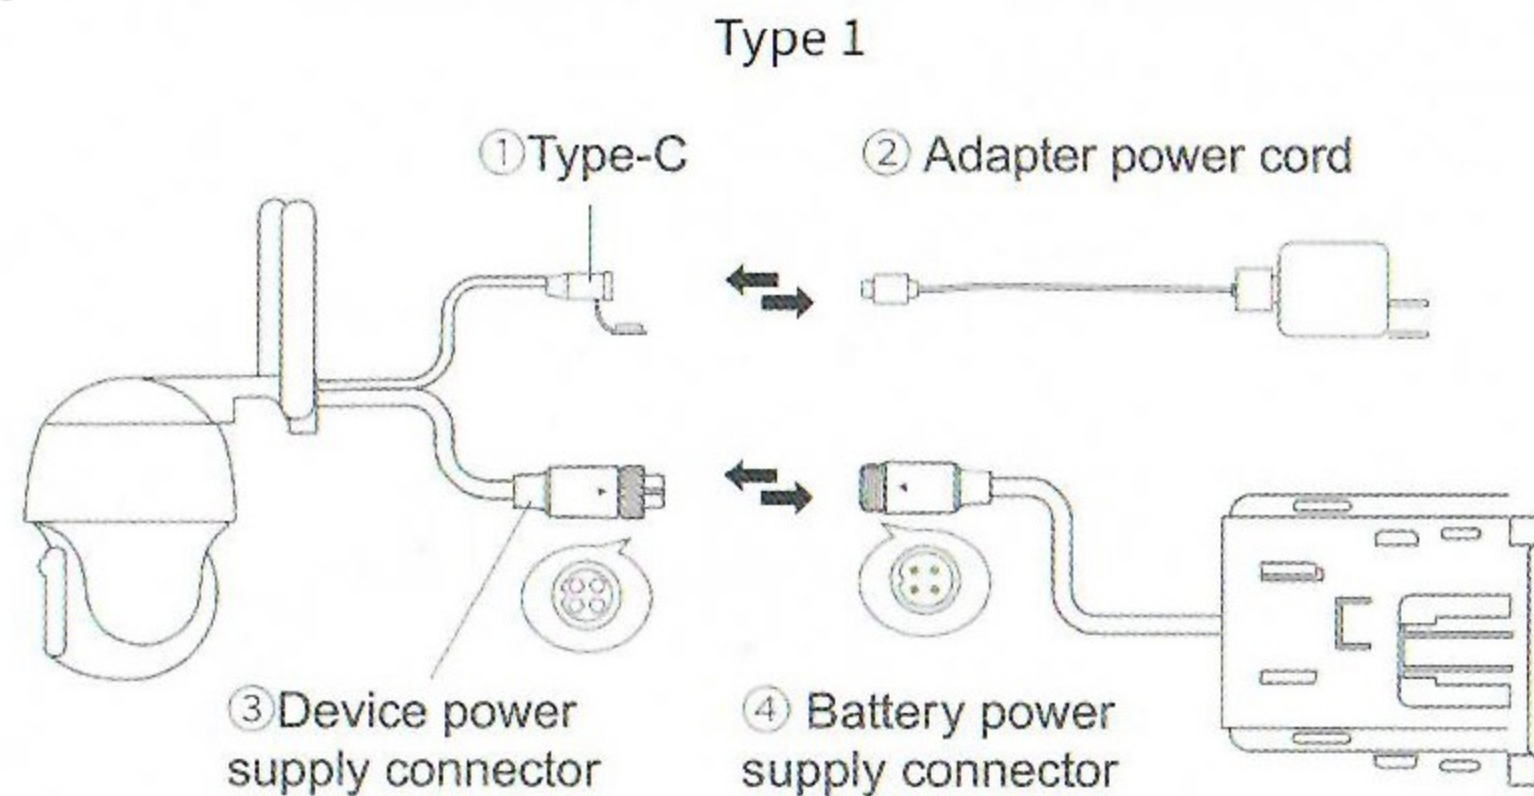

Type 2

Device initialization

Press and hold the reset button for several seconds, the device will prompt " **Reset completed** " and the indicator light will flash alternately, which means the reset is successful.

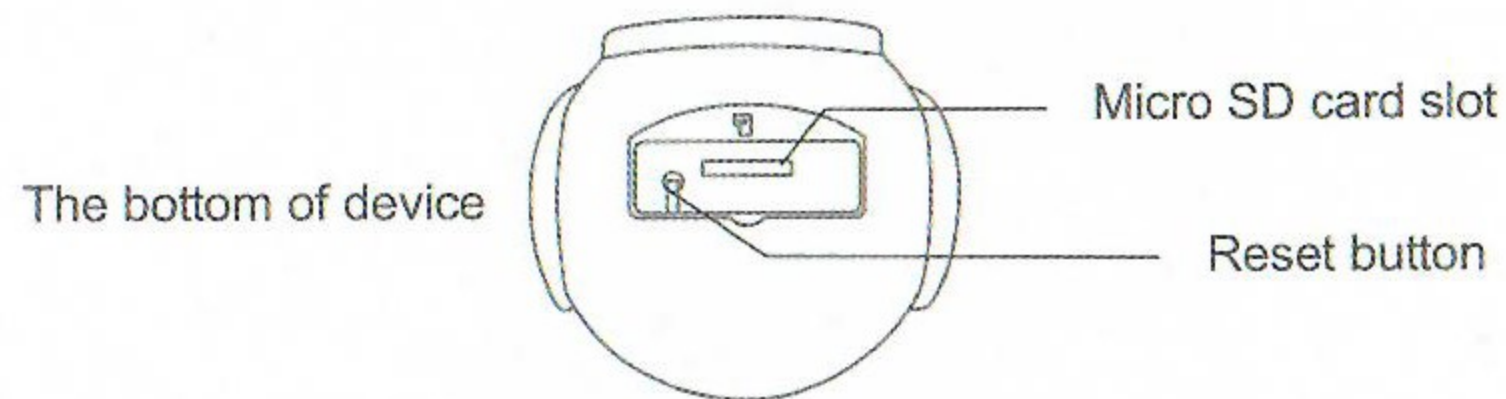

Device indicator light

1. Indicator is off: device is powered off or standby mode;
2. Indicator is red: device is powered on and wakes up, but the network is unavailable;
3. Indicator is yellow: device is connected to the network;
4. Indicator red light flashes continuously: device can't detect the SIM card, please check whether the card is inserted;
5. Indicator red light flashes twice continuously: SIM card can be detected, but device can't connect to the Internet. Please check whether mobile data plan is available.

Install xiaovv APP



Download and install xiaovv from the APP Store or scan the QR code



Scan the QR code to download xiaovv APP

Add Camera

1. Open xiaovv APP to register your account and log in.
2. Click the "+" icon and scan the QR code on the device or manually enter the device ID, then follow the instruction to add your device.

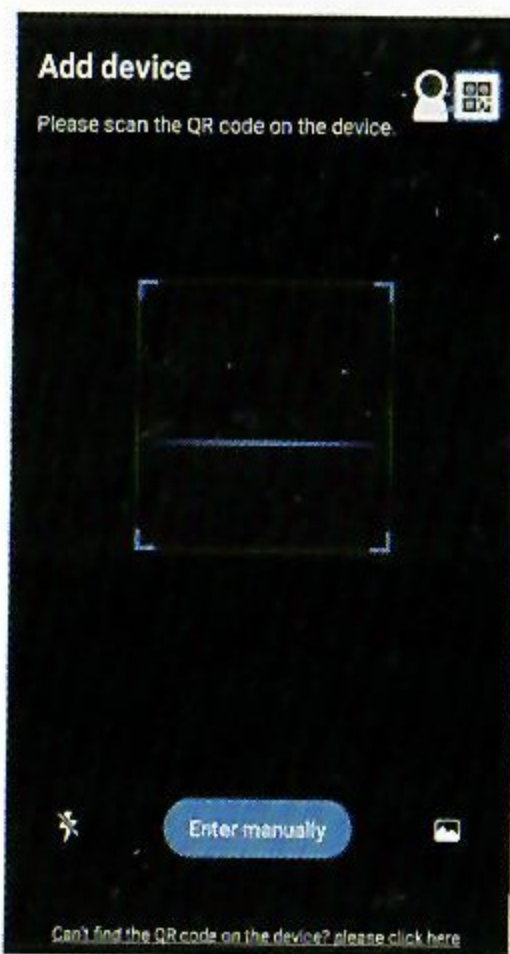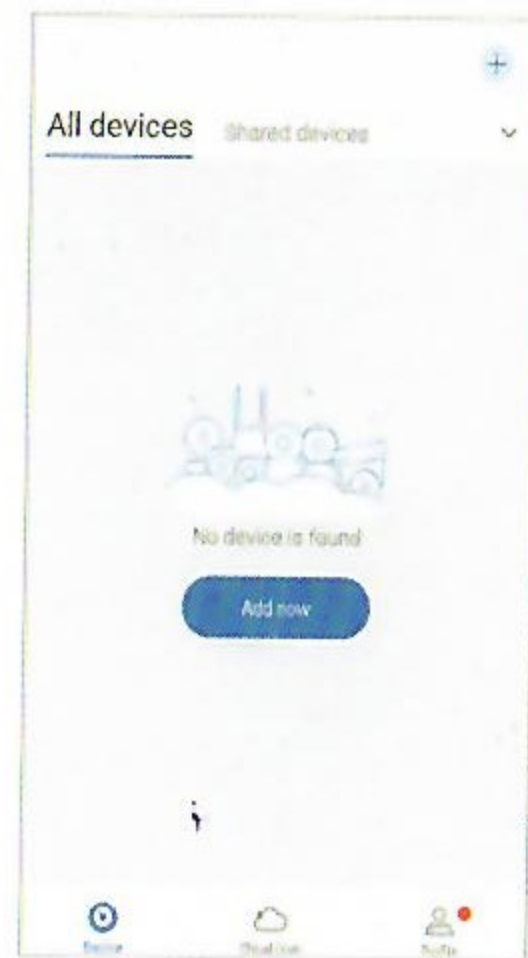


Live View

You can use Live View in the APP when the device is online.




Mounting

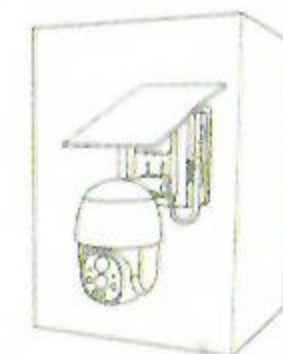


Type1




Type2

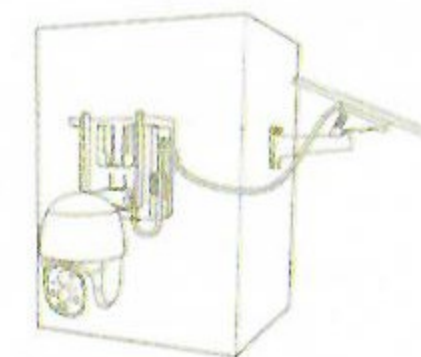


Type3

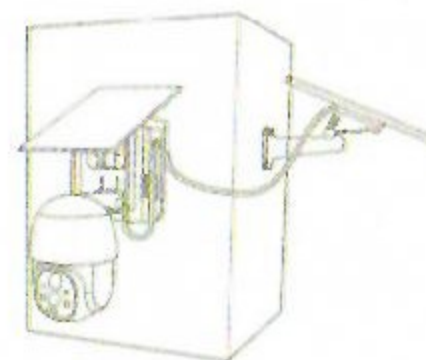

Double solar panels
(extra)

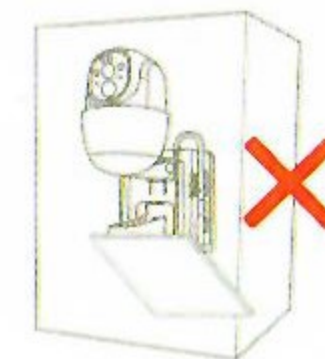

Inverted mounting
(wrong)

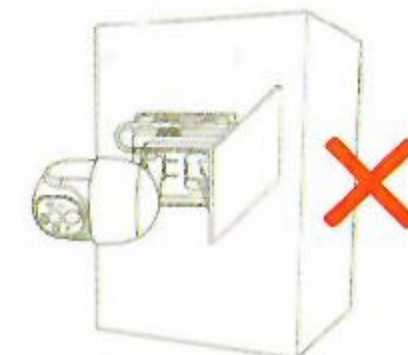


Side mounting
(wrong)

Please install the device in a place with strong Wi-Fi signal.

After completing the network configuration, refer to the Wi-Fi signal in the upper left corner of the real-time image in the APP. If the signal is weak, please optimize the Wi-Fi environment before installing and configuring the network.

1. Choose the mounting hole template you need and paste it on the wall.

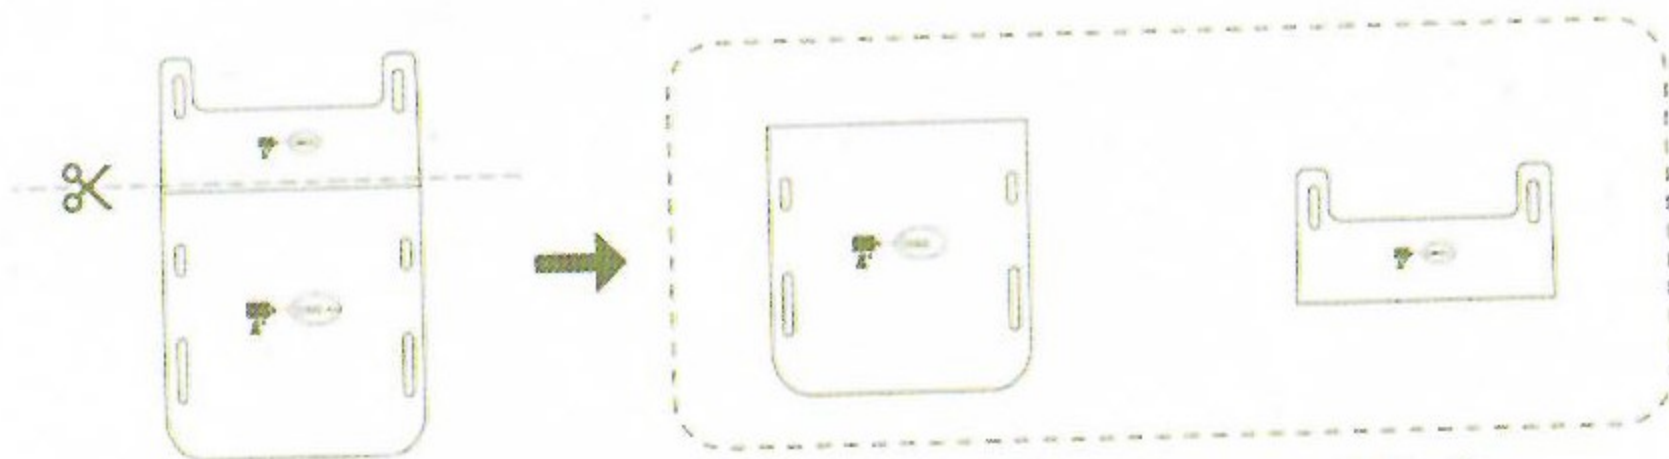


Cut the stickers you need


Type 1

Type 2

2. Drill holes in the wall according to the marker on the mounting template, the hole diameter is about 6mm, and the hole depth is about 26mm.

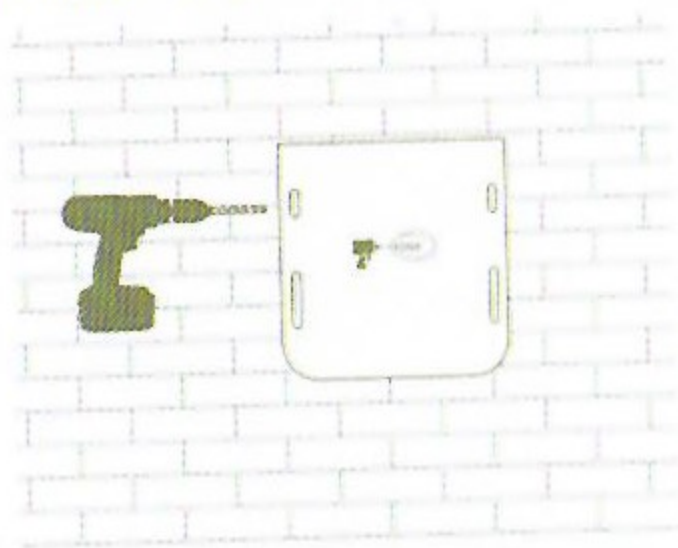


Type 1

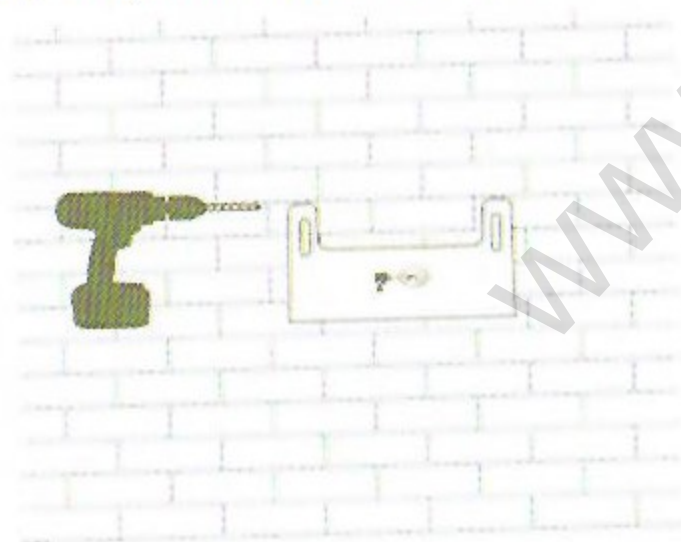


Type 2

*The wall must be able to bear the weight of 3 cameras.


3.

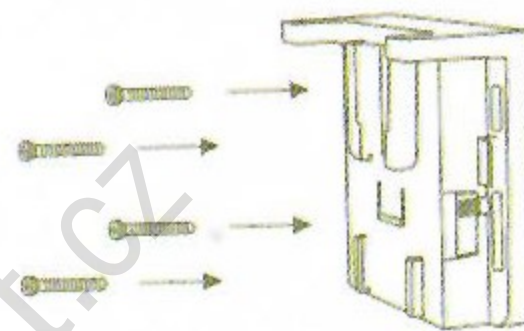


Secure the bracket on the wall using the provided screws

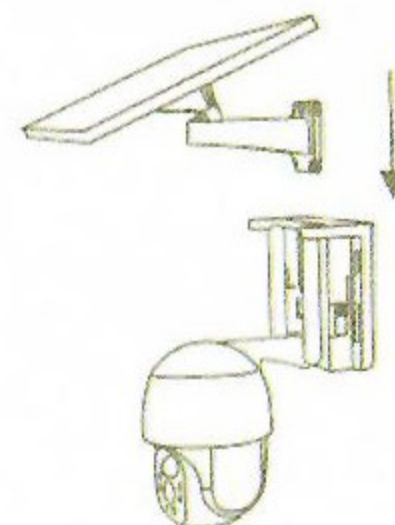

Mount the solar panel on the bracket (Type 1)

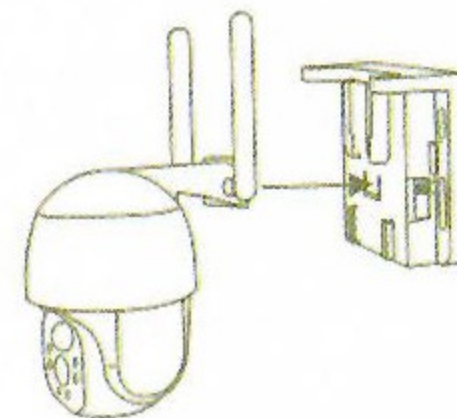


Mount the device on the bracket

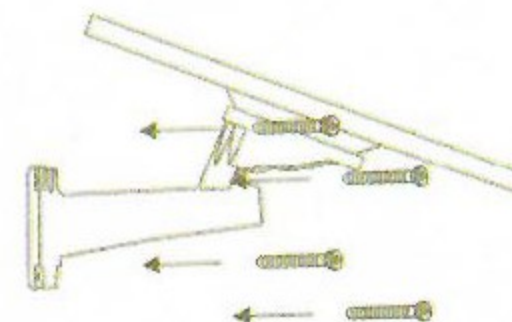

Secure the bracket on the wall using the provided screws (Type 2)

4. Connect the solar panel to the battery.

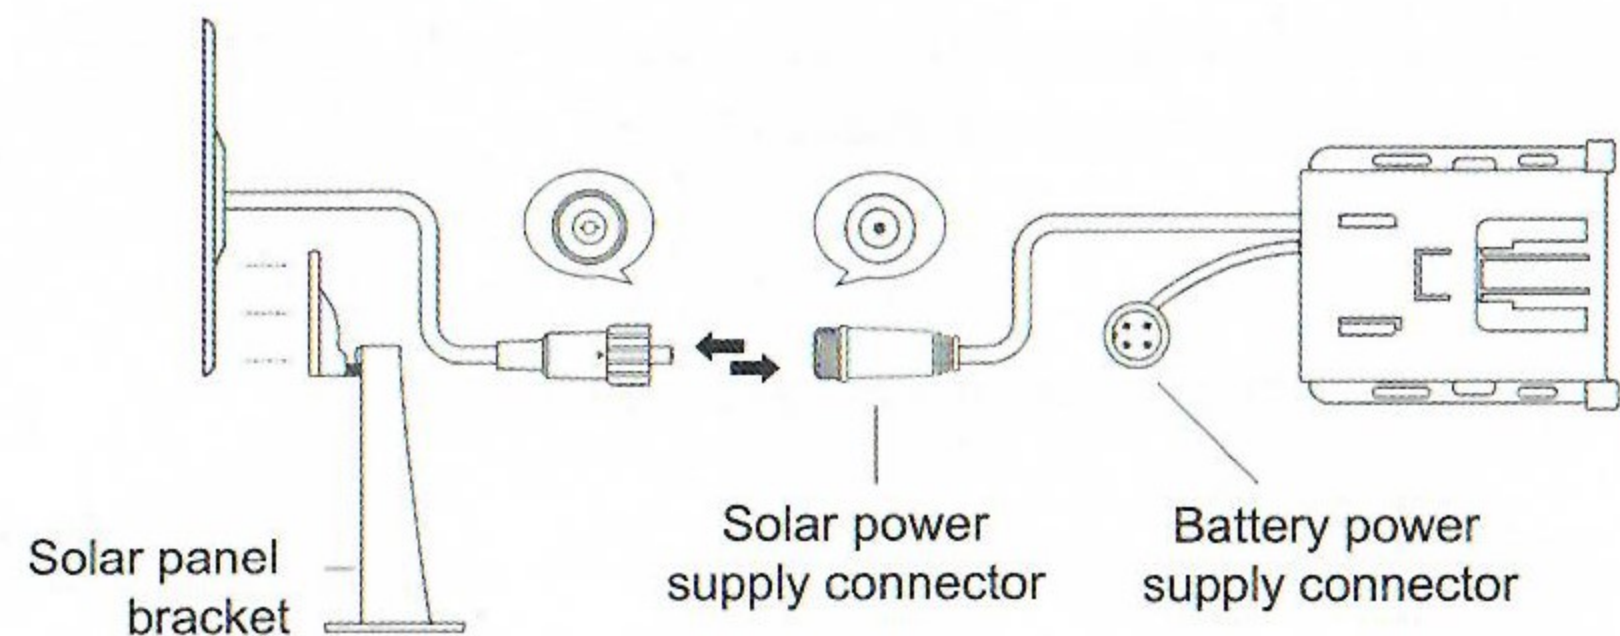

Tips on PIR motion detection:

PIR motion detection: the device detects infrared rays radiated by the human body based on a passive infrared sensor(PIR) to trigger an alarm.

"PIR sensitivity" can be set in the "settings". To use in an environment with heavy traffic, it is recommended to set "PIR sensitivity" to low to avoid unnecessary wake-ups to extend the battery life of the device.



Cloud service

You can enjoy these special functions after subscribing the cloud service on the [Cloud Disk] interface of the xiaovv APP.

Cloud service special functions



Cloud storage



Speed up playback



Alarm recording



Check at any time



Security encryption



Loop video recording

* Cloud service is a value-added service that requires payment.